


# CO<sub>2</sub> Incubators

## High Heat Decontamination 3552



The SHEL LAB 3552 is designed to stop microbial contamination caused by mycetozoa, yeast, viruses, and bacteria and the range of other microorganisms that thrive in incubator environments.

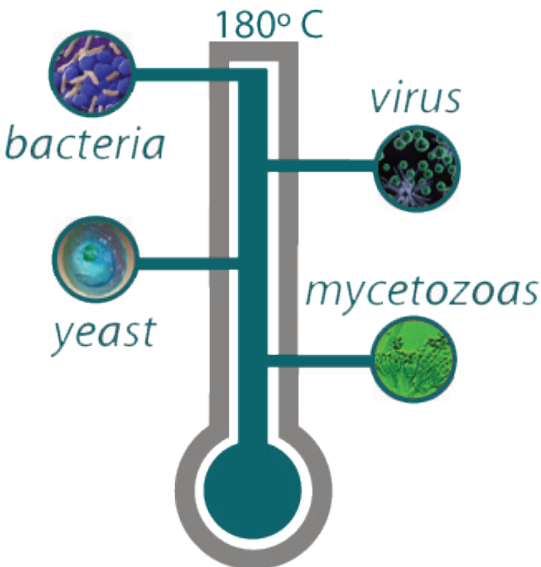

**Microbial Contamination Die Off**

### PROTECT YOUR SAMPLES WITH HIGH HEAT DECONTAMINATION!

The model 3552 features a dry heat decontamination cycle, that maintains 180°C for 120 minutes. This industry best time and temperature relationship satisfies all global standards for decontamination.

This is decontamination at its fastest easiest and most effective - it is not necessary to remove the IR CO<sub>2</sub> sensor prior to activating the decontamination process and we feature the shortest cycle time on the market. This is a more convenient approach and eliminates potential damage to the sensitive IR sensor.

Other features of the 3352 include a USB interface for software communication, precise temperature control microprocessor and an independent over temperature safety controller.


### CONTAMINATION CONTROL


Extensive use of copper in the CO<sub>2</sub> sample port, heated CO<sub>2</sub> feed line and humidity pan with a copper SL decontamination token, adds reassurance that foreign microbes will not affect test results. Cleanup is a breeze with the all stainless steel chamber, and autoclavable door gasket. Optional copper shelves are available for even more contamination control.



### Infrared (IR) CO<sub>2</sub> Sensors

For the fastest CO<sub>2</sub> recovery and most stable performance, the 3552 features IR sensors.

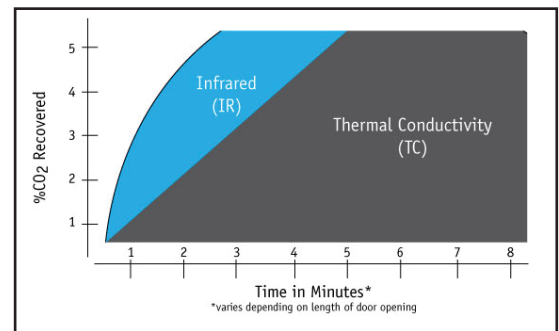



**5 Year  
Limited  
Warranty!**

We stand behind our product quality, ShellLab CO<sub>2</sub> Incubators come with the most extensive warranties in the industry.

- 5 years parts (labor included in the US)
- 7 years IR sensor



		Model Number
Incubators, Infrared (IR) CO <sub>2</sub> Sensor	110-120V	3552
	220-230V	3552-2
High Heat Decontamination		
Exterior Dimensions (wxdxh)	Inches	28.8 x 30.3 x 39.3
	cm	73.1 x 76.8 x 99.7
Chamber Dimensions (wxdxh)	Inches	20.2 x 20.0 x 25.5
	cm	51.4 x 50.8 x 64.7
Incubator Chamber Capacity	cu ft	5.9
	L	167
CO <sub>2</sub> Range	%	0-20%
CO <sub>2</sub> Sensor Accuracy	at 5%	+/-0.1%
CO <sub>2</sub> Recovery Rate	to 5%	<5 Minutes to 95% of Setpoint
Relative Humidity	at 37°C	Up to 95%
Temperature Range	Celsius	Ambient +5°C to 50°C
Temperature Uniformity	Celsius	+/- 0.25°C at 37°C
Over Temperature Protection	Yes/No	Yes
Temperature Alarm	Yes/No	Yes
CO <sub>2</sub> Alarm	Yes/No	Yes
Number of Shelves	Included	3
<p>*All specifications are determined by using average values on standard equipment at an ambient temperature of 25°C (77°F) and line voltages within +/-10% of unit type (115V/230V). Temperature specifications follow DIN 12880 methodology. We reserve the right to change specifications at any time.</p>		


0740519 9/13



**copper shelving option**

**more information copper shelving**

Copper Shelf Options	Part Number
Copper Shelf Slides	5820505
Copper Shelf	5820504
Copper Shelf Kit (3 Shelves, 6 Slides)	9750582



**www.shellab.com**  
**1-800-322-4897**