


## “witeg” **WiseClean® WUC** Ultrasonic Cleaners with Analog Timer & Temperature Controller Highly Effective Cleaning, Stainless Steel, up to 85 °C, 0~30 min, 28/40 kHz Frequency



**Ultrasonic Cleaner  
(WUC-A10H)**



**Ultrasonic Cleaner  
(WUC-A06H)**

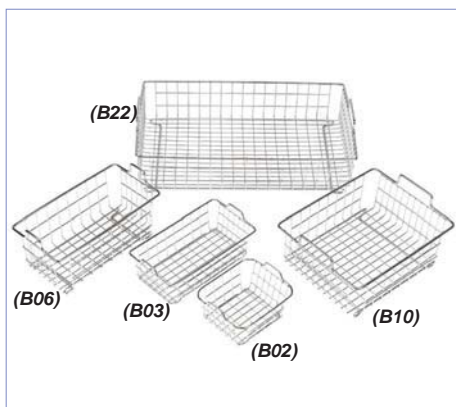

**Stainless Steel Wire Baskets  
(Optional)**

### Application & Features

- \* Useful for Cleaning to Remove Dirt, Grease, Waxes and Oil from all Lab Instruments by Ultrasonic Frequency.
- \* Made of Stainless Steel, Finished Surface.
- \* Analog Controller, Timer, Temperature and Output Control.
- \* Temperature Range from Ambient to 85 °C. (1,2 & 1,8 Lit. : 65 °C Fixed)
- \* Convenient Preset Function : Heating and Timer.
- \* HF-Frequency : 40 kHz for WUC-A03 / 06 / 10 / 22H models and 28 kHz for WUC-A01H / A02H models.
- \* Bottom-Mounted Drain. (WUC-A10H and WUC-A22H)
- \* Maximum 30minutes Set Cleaning Time. (Except WUC-A10H)

### Specification

Model	WUC-A01H	WUC-A02H	WUC-A03H	WUC-A06H	WUC-A10H	WUC-A22H
Capacity	1,2 Lit.	1,8 Lit.	3,3 Lit.	6 Lit.	10 Lit.	22 Lit.
Tank Size inner (w×d×h) (mm)	150×135×60	150×135×100	240×140×100	290×150×150	290×240×150	500×300×150
Heating Temp.	65 °C Fixed	65 °C Fixed	ambient to 85 °C	ambient to 85 °C	ambient to 85 °C	ambient to 85 °C
Timer	None	0~30 min.	0~30 min.	0~30 min.	0~30 min.	0~30 min.
Drain-Valve	None	None	None	None	1/2" NPT	1/2" NPT
HF-Peak Out	50 W	50 W	100 W	150 W	200 W	250 W
Frequency	28 KHz	28 KHz	40 KHz	40 KHz	40 KHz	40 KHz
Weight	1,8 kg	2,5 kg	4 kg	5,3 kg	6,2 kg	10 kg
Packing Dimension (w×d×h) (cm)	20×20×19	20×20×24	32×20×29	37×22×35	43×32×36	64×38×37
Gross Weight	3 kg	4 kg	5 kg	6 kg	7 kg	11 kg
Power Consumption	140 W	140 W	290 W	340 W	540 W	760 W
Power plug type	Hybrid E+F					
Power Supply*	AC 230 V, 50 / 60 Hz					

### Ordering Information

- DH.WUC.A01H\* Ultrasonic Cleaner, **WUC-A01H**, 1,2 Lit.  
 DH.WUC.A02H\* , **WUC-A02H**, 1,8 Lit.  
 DH.WUC.A03H\* , **WUC-A03H**, 3,3 Lit.  
 DH.WUC.A06H\* , **WUC-A06H**, 6 Lit.  
 DH.WUC.A10H\* , **WUC-A10H**, 10 Lit.  
 DH.WUC.A22H\* , **WUC-A22H**, 22 Lit.

\* **Basket is not Included**

### Stainless Steel Baskets (Optional)

- DH.WUC.B02 Basket, Wire, **B02**, for 1,8 Lit., (in)120×105×h 65 mm  
 DH.WUC.B03 , **B03**, for 3,3 Lit., (in)215×115×h 65 mm  
 DH.WUC.B06 , **B06**, for 6 Lit., (in)274×123×h 96 mm  
 DH.WUC.B10 , **B10**, for 10 Lit., (in)262×206×h 93 mm  
 DH.WUC.B22 , **B22**, for 22 Lit., (in)452×263×h 93 mm

**“witeg” WiseClean® WUC Digital Ultrasonic Cleaner-set, 6-/10-/22- Lit.**  
**with Wire Basket & Lid, and Timer Highly Effective Cleaning, Stainless Steel, up to 80 °C, 0–99 min., 40 kHz Frequency**

**Application & Features**


- \* Useful for Cleaning to Remove Dirt, Grease, Waxes and Oil from all Lab instruments by Ultrasonic Frequency.
- \* Microprocessor Control : Timer, Temperature and Output Control.
- \* Multi-Frequency Sonication Body.
- \* HF - Frequency : 40 kHz
- \* Temperature Range from Ambient to 80 °C
- \* Convenient Preset Function : Heating and Timer.
- \* Bottom - Mounted Drain. (WUC-D10H, WUC-D22H)
- \* Maximum 60minutes Set Cleaning Time.

**Specification**

Model	WUC - D06H	WUC - D10H	WUC - D22H
Capacity (Liters)	6	10	22
Tank Size inner (w×d×h) (mm)	290×150×150	290×240×150	500×300×150
Heat temp.	ambient to 80 °C	ambient to 80 °C	ambient to 80 °C
Timer	0–60 min.	0–60 min.	0–60 min.
Drain-valve	None	1/2" NPT	1/2" NPT
HF-peak out	140 W	210 W	280 W
Frequency	40 kHz	40 kHz	40 kHz
Weight	5,4 kg	7,3 kg	10,2 kg
Packing Dimension (w×d×h) (mm)	360×220×350	440×320×360	640×380×370
Gross Weight	6 kg	8 kg	11 kg
Power Consumption	510 W	690 W	980 W
Power plug type	Hybrid E+F		
Power Supply*	AC 230 V, 50 / 60 Hz		



Digital Ultrasonic Cleaner Set

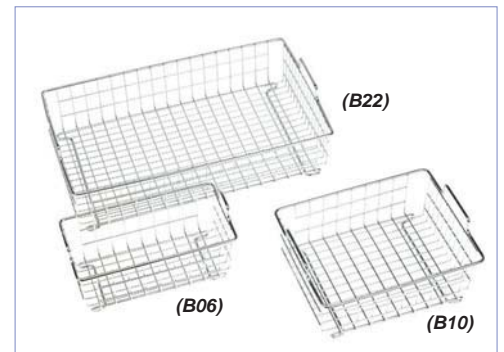

Stainless Steel Wire Baskets (included)

**Ordering Information**

- DH.WUC.D06H\* Ultrasonic Cleaner, Digital, **WUC-D06H**, 6 Lit.  
 DH.WUC.D10H\* , **WUC-D10H**, 10 Lit.  
 DH.WUC.D22H\* , **WUC-D22H**, 22 Lit.  
 \*1 × wire Basket Included

**Stainless Steel Baskets (Spare)**

- DH.WUC.B06 Basket, Wire, **B06**, for 6 Lit., (in)247×123×h 96 mm  
 DH.WUC.B10 , **B10**, for 10 Lit., (in)262×206×h 93 mm  
 DH.WUC.B22 , **B22**, for 22 Lit., (in)452×263×h 93 mm

**“witeg” WiseClean® WUC 30~74 Lit. Ultrasonic Cleaner, with Digital Remote Generator**  
 Highly Effective Cleaning, Stainless Steel, with LCD display & Timer up to 105 °C, 0~99 min, 40 kHz Frequency



47 Lit. Ultrasonic Cleaner.  
(WUC-N47H)



Optional Stainless Steel Wire Basket

**Application & Features**

- \* Useful for Cleaning to Remove Dirt, Grease, Waxes and Oil from all Lab Instruments by Ultrasonic Frequency.
- \* Remote Generator : Power Control and Timer Function with LCD.
- \* BTL Sonicator Installed : Robust and Stable Running.
- \* Sweep Function can Realize Complete Cleaning by the Dispersion of Ultrasound.
- \* Auto Optimization of Frequency as various Water Level and Temperature.
- \* Foot Switch Control.
- \* HF-Frequency : 40 kHz
- \* Temperature Range from Ambient to 105 °C
- \* Supply Full Set with Lid, Foot Switch and Generator. (Basket excluded)
- \* Bottom - Mounted Drain.
- \* Maximum 99 minutes Set Cleaning Time.

**Specification**

Model	WUC- N30H	WUC- N47H	WUC- N60H	WUC- N74H
Capacity (Lit.)	30 Lit.	47 Lit.	60 Lit.	74 Lit.
Tank Size inner (w×d×h) (mm)	400×300×250	450×350×300	500×400×300	550×450×300
Tank Size external (w×d×h) (mm)	480×380×400	530×430×450	580×480×450	630×530×450
Heat temp.	ambient to 105 °C	ambient to 105 °C	ambient to 105 °C	ambient to 105 °C
Timer (min)	0~99 min.	0~99 min.	0~99 min.	0~99 min.
HF-peak out	600 W	900 W	1.200 W	1.500 W
HF-frequency	40 kHz	40 kHz	40 kHz	40 kHz
Power Supply	AC 230 V, 50 / 60 Hz			
Weight net	26 kg	31 kg	36 kg	41 kg
Packing Dimension (w×d×h) (mm)	620×520×640	670×570×710	720×620×710	770×670×710
Gross Weight	32 kg	37 kg	42 kg	47 kg
<b>Remote Generator</b>				
Cable Length of Remote Generator	2,6 m			
Power Consumption	600 W	900 W	1.200 W	1.500 W
Power plug type	Hybrid E+F			
Power Supply*	AC 230 V, 50 / 60 Hz			
Weight net	9 kg	10 kg	10 kg	10 kg

\* Other Specifications are available upon Customer's Request.

**Ordering Information**

- DH.WUC.N30H\* Ultrasonic Cleaner, without Basket, **WUC-N30H**, 30 Lit.  
 DH.WUC.N47H\* , **WUC-N47H**, 47 Lit.  
 DH.WUC.N60H\* , **WUC-N60H**, 60 Lit.  
 DH.WUC.N74H\* , **WUC-N74H**, 74 Lit.

\* **Wire Basket Included**

**Optional Stainless Steel Wire Baskets**

- DH.WUC.B30 Basket, Wire, **B30**, for 30 Lit., 340×240×h 150 mm  
 DH.WUC.B47 , **B47**, for 47 Lit., 390×290×h 200 mm  
 DH.WUC.B60 , **B60**, for 60 Lit., 440×340×h 200 mm  
 DH.WUC.B74 , **B74**, for 74 Lit., 490×390×h 200 mm